


## JNT-EVC11 Series



- Stylish durable design
- Top quality PC, Anti-UV treatment, Automotive coating
- IK08 & Type 3 for indoor & outdoor use
- Switchable from 48A to 16A
- RFID Card reader optional
- LED indicator
- LAN standard, Wi-Fi optional
- OCPP 1.6J optional
- SAE J1772 charging plug with 18ft cable

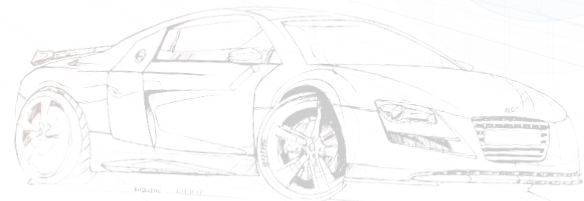

## Installation



Wall-mounted



Single pedestal



Back-to-back pedestal



Back-to-back pedestal with cable management system



Dual side-to-side cable management system

# Level 2 AC EV Charger

Model No.	JNT-EVC11/16AC	JNT-EVC11/32AC	JNT-EVC11/40AC	JNT-EVC11/48AC
Input Voltage	208 – 240 Vac			
Frequency	50-60Hz			
Amperage	16A	32A	40A	48A
Max. Power Output	3.8kW	7.6kW	9.6kW	11.5kW
<b>Function</b>				
User Authentication	Optional RFID (ISO 14443)			
Network	LAN Standard (Wi-Fi Optional with Surcharge)			
Connectivity	Optional OCPP 1.6 J			
<b>Protection &amp; Standard</b>				
Certificate	ETL & FCC			
Charging Interface	SAE J1772 compliant			
Safety Compliance	UL2594, UL2231-1/-2			
Multiple Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection			
<b>Environmental</b>				
Operating Temperature	-22°F to 122°F			
Indoor / Outdoor	IK08 & Type 3 enclosure			
Relative Humidity	Up to 95% Non-condensing			
Cable Length	18ft Standard, 25ft Optional with Surcharge			
<b>Dimensions &amp; Weights</b>				
Product Dimensions	14.2" x 9.8" x 3.9"			
Package Dimensions	19.6" x 13.7" x 9.3"			
Net Weight	12.1lbs	12.1lbs	14.6lbs	15.7lbs
Gross Weight	14.6lbs	14.6lbs	17.0lbs	18.1lbs
<b>Pedestal</b>	<b>JNT-SP</b>	<b>JNT-BBP</b>	<b>JNT-BBPC</b>	<b>JNT-SSPC</b>
Dimensions	10.6" x 6.1" x 54.9"	10.6" x 6.1" x 54.9"	15.7" x 8.7" x 78.2"	20.8" x 8.7" x 78.2"
Net Weight	28.7lbs	28.7lbs	97lbs	118lbs
Gross Weight	37.5lbs	37.5lbs	113lbs	140lbs
Product Material	Powder Coated Steel			